


DATE  
6.5.2020

Reference component  
Samsung\_LM281B (x16)  
Recommended LED spacing in  
cluster 0,2mm

Positioning of different LED combinations  
Recommended LED spacing in cluster 0,2mm

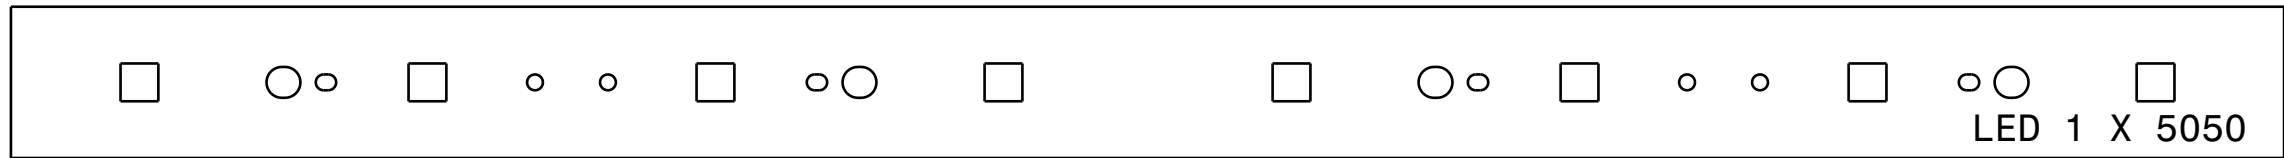


Detail A  
Scale: 2:1

Notes

Ensure LED fitting from a product specific 3D model available from  
[www.ledil.com](http://www.ledil.com)  
For more details about installation please see LEDiL Installation Guide on  
[www.ledil.com](http://www.ledil.com)

PART	TYPE	MATERIAL	COLOR / COATING
PWB_DAISY-8x1-M	PWB		

MECHANICAL DRAWING		LEDiL®
PRODUCT	DAISY	
Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.	FIRST ANGLE PROJECTION: 	This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.
SCALE 1:1	WEIGHT -	A3 SHEET 1/1