

LINDA

Seamless linear extrusion lenses with excellent optical control and innovative installation.

LINDA is an industry first linear extrusion lens family with precise light control. The optics are made of diffused PMMA for high optical efficiency with good LED source hiding power and exceptional colour-over-angle performance for an extrusion. They are easy to install by either pressing or sliding the lens into the luminaire housing and are offered in popular beam patterns. LINDA can be customized for luminaires for different lengths and is compatible with single row mid-power PCBs.


LINDA-24

24 mm variant for up to 24 mm wide Zhaga PCBs



PRODUCTS:


F16859_LINDA-ZT25

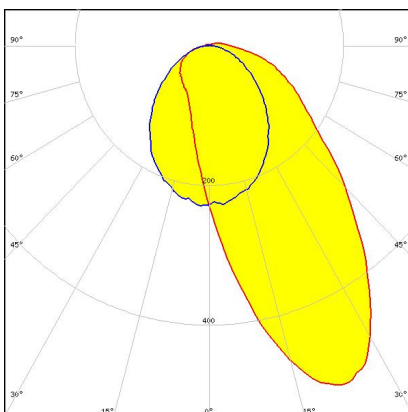

Dimensions: 25.7 mm x 1140.0 mm
Height: 6.50 mm

Asymmetric beam for wall washing


F17131_LINDA-ZT25-48in

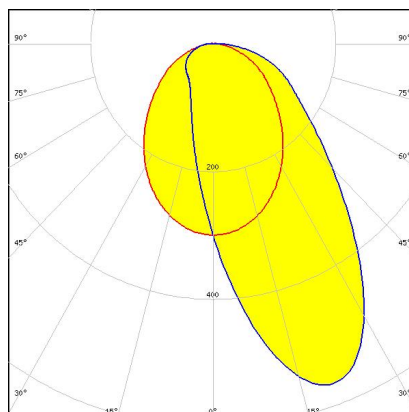

Dimensions: 25.7 mm x 1220.0 mm
Height: 6.50 mm

Asymmetric beam for wall washing. 48 inches in length.

F17201_LINDA-UP2

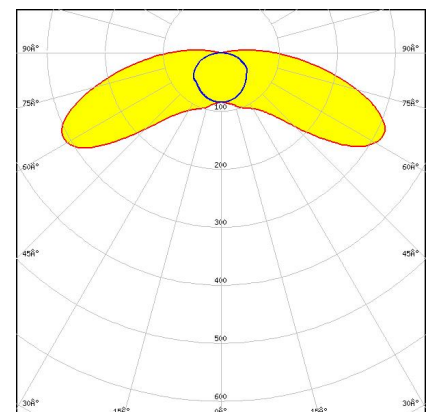


Dimensions: 25.4 mm x 1140.0 mm
Height: 11.40 mm

~165° + 130° extra wide beam for uplighting


PRODUCTS:

F16747_LINDA-WWW

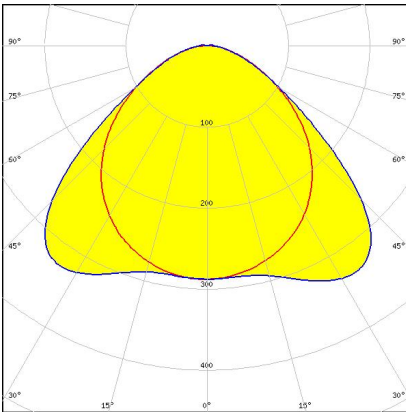


Dimensions: 25.7 mm x 1140.0 mm
Height: 6.34 mm
 ~110° + 100° wide beam

F16858_LINDA-Z2T25

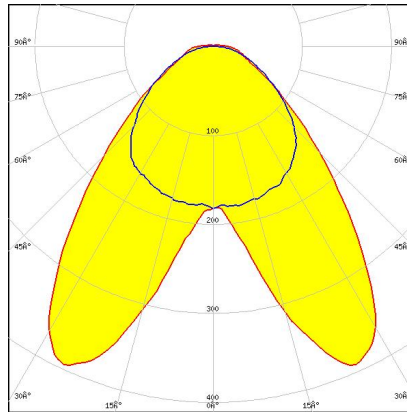


Dimensions: 25.7 mm x 1140.0 mm
Height: 5.30 mm
 Double asymmetric beam for aisle and shelf lighting

F17130_LINDA-Z2T25-48in

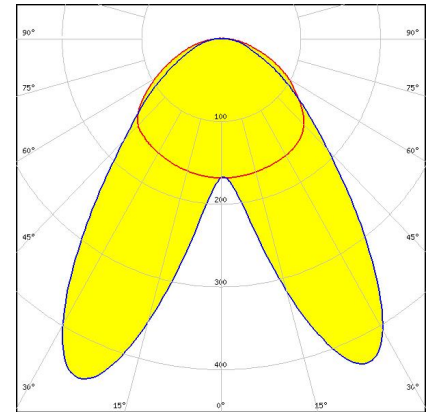


Dimensions: 25.7 mm x 1220.0 mm
Height: 5.30 mm
 Double asymmetric beam for aisle and shelf lighting. 48 inches in length.

F17194_LINDA-WW2

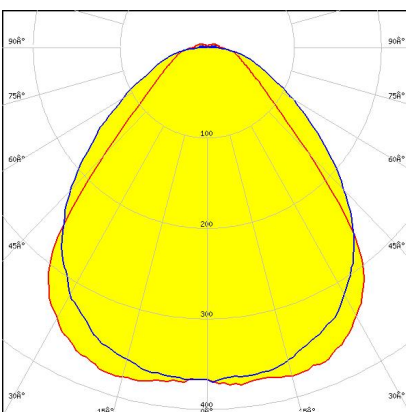


Dimensions: 25.7 mm x 1140.0 mm
Height: 5.30 mm
 ~90° + 100° wide beam

F16636_LINDA-W60

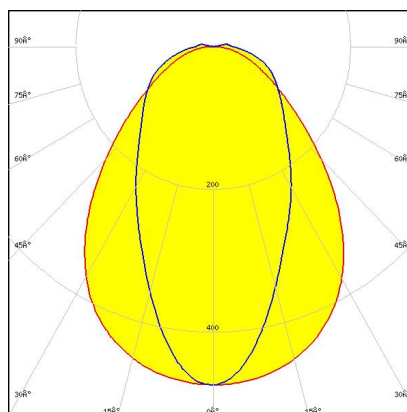

Dimensions: 23.8 mm x 1140.0 mm
Height: 6.34 mm
 ~60° + 90° beam


F16749_LINDA-WW

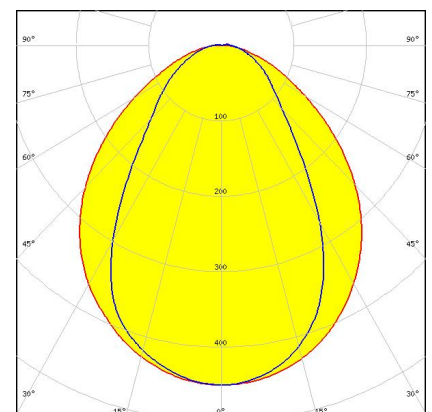

Dimensions: 25.7 mm x 1140.0 mm
Height: 5.30 mm
 ~70° + 100° beam

PRODUCTS:

F16860_LINDA-UP

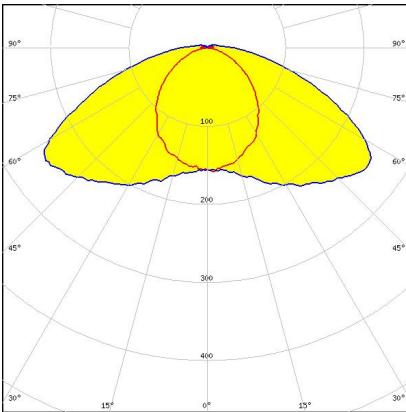


Dimensions: 25.7 mm x 1140.0 mm

Height: 7.80 mm

~145° + 100° extra wide beam for
uplighting

F17132_LINDA-UP-48in

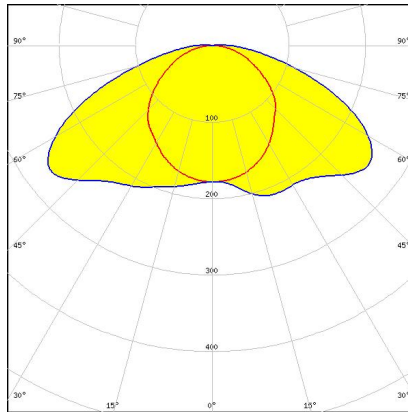


Dimensions: 25.7 mm x 1220.0 mm

Height: 7.80 mm

~145° + 100° extra wide beam for
uplighting. 48 inches in length.

F16748_LINDA-O

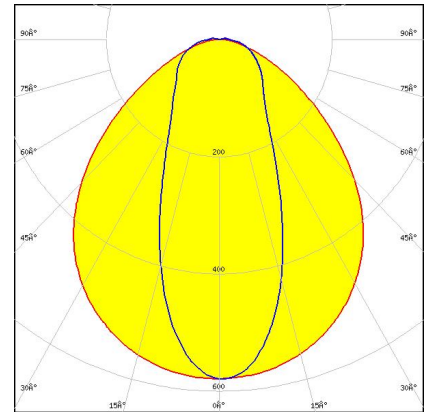

Dimensions: 25.7 mm x 1140.0 mm

Height: 4.98 mm

~40° + 100° oval beam

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 7
FI-24100 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)