

## SPORT-2X2-FT4

Narrow forward throw beam with balanced spill  
light control and backlight.

## SPECIFICATION:

Dimensions	50.0 x 50.0
Height	13 mm
Fastening	screw
ROHS compliant	yes ⓘ




## MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
SPORT-2X2-FT4	Multi-lens	PMMA	clear		

## ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C18450_SPORT-2X2-FT4 » Box size: 480 x 280 x 300 mm	640	128	128	9.6

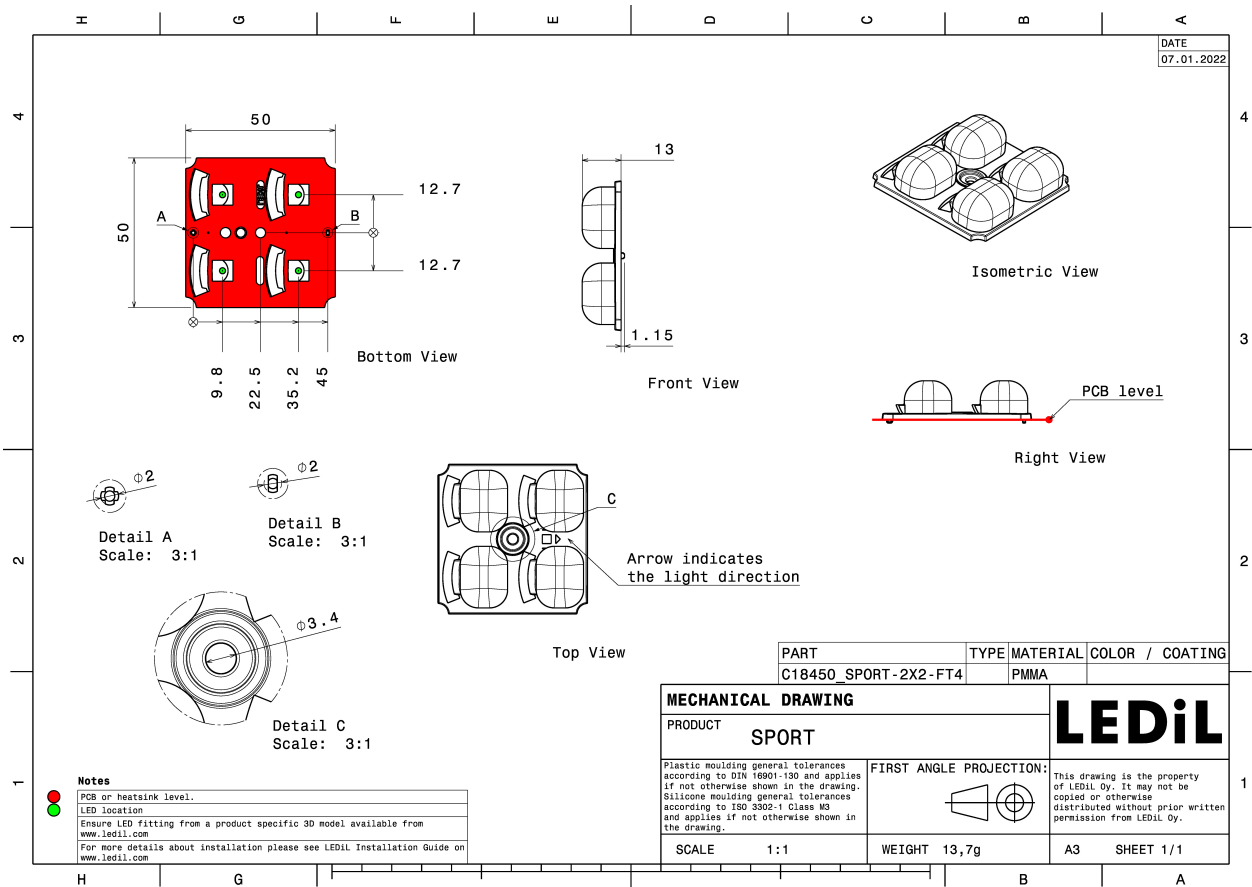


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

#### OPTICAL RESULTS (MEASURED):




LED LUXEON 5050 Square LES  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

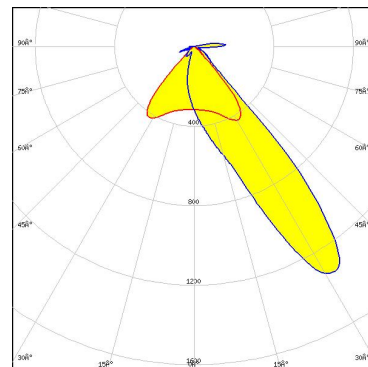

Light distribution files



LED NV4WB35AM  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 1.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

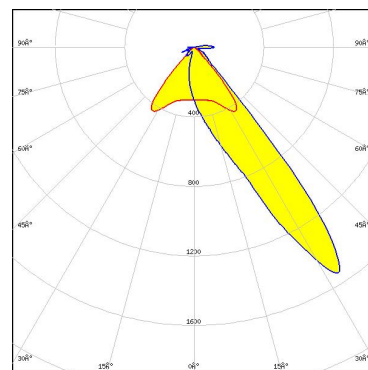


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED XP-G3  
FWHM / FWTM Asymmetric  
Efficiency 91 %  
Peak intensity 1.4 cd/Im  
LEDs/each optic 1  
Light colour/type White  
Required components:

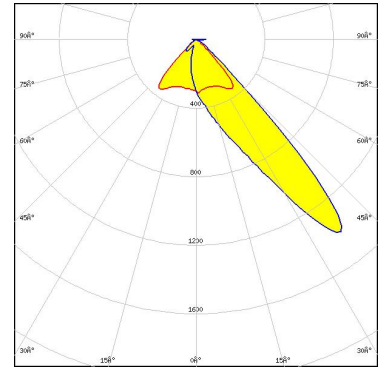

Light distribution files



LED XP-G3  
FWHM / FWTM Asymmetric  
Efficiency 84 %  
Peak intensity 1.3 cd/Im  
LEDs/each optic 1  
Light colour/type White  
Required components:

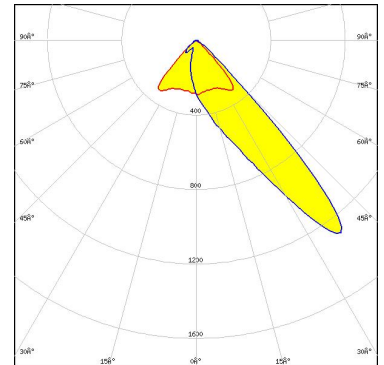


Protective plate, glass

Light distribution files



LED XP-G4 HI  
FWHM / FWTM Asymmetric  
Efficiency 86 %  
Peak intensity 1.4 cd/Im  
LEDs/each optic 1  
Light colour/type White  
Required components:

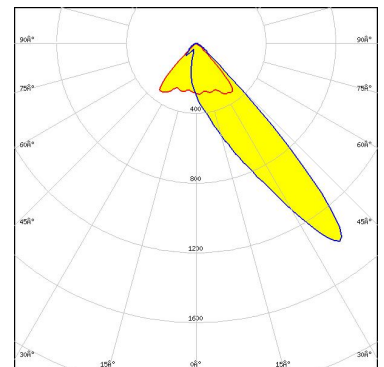


Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED XP-G4 HI  
 FWHM / FWTM Asymmetric  
 Efficiency 95 %  
 Peak intensity 1.6 cd/Im  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

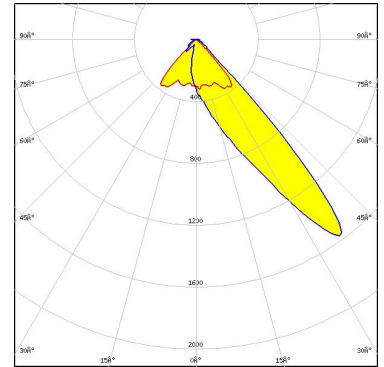

Light distribution files



LED LUXEON 5050 HE  
 FWHM / FWTM Asymmetric  
 Efficiency 86 %  
 Peak intensity 1.3 cd/Im  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

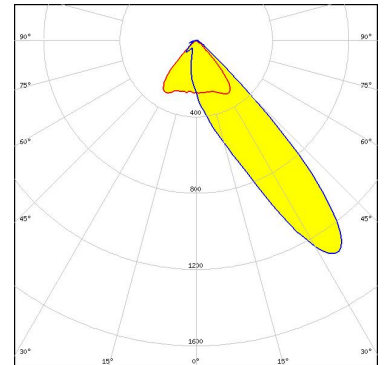


Light distribution files

Protective plate, glass



LED LUXEON 5050 HE  
 FWHM / FWTM Asymmetric  
 Efficiency 90 %  
 Peak intensity 1.4 cd/Im  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

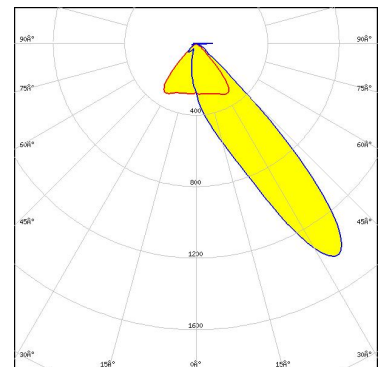

Light distribution files


#### OPTICAL RESULTS (SIMULATED):



LED LUXEON 5050 HE Plus  
 FWHM / FWTM Asymmetric  
 Efficiency 84 %  
 Peak intensity 1.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Protective plate, glass

Light distribution files

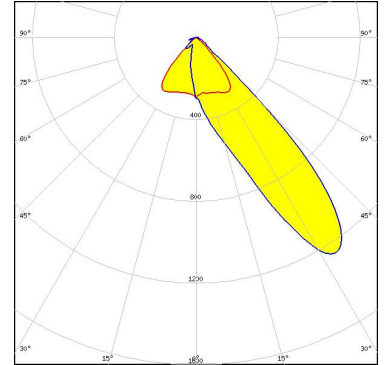

LED LUXEON 5050 HE Plus  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 1.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Light distribution files

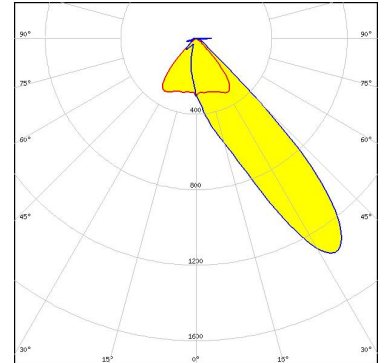

LED LUXEON 5050 Square LES  
 FWHM / FWTM Asymmetric  
 Efficiency 87 %  
 Peak intensity 1.2 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass

Light distribution files

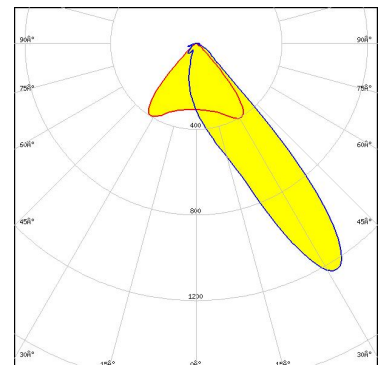


#### OPTICAL RESULTS (SIMULATED):



LED LUXEON HL4X  
 FWHM / FWTM Asymmetric  
 Efficiency 86 %  
 Peak intensity 1.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Protective plate, glass

Light distribution files

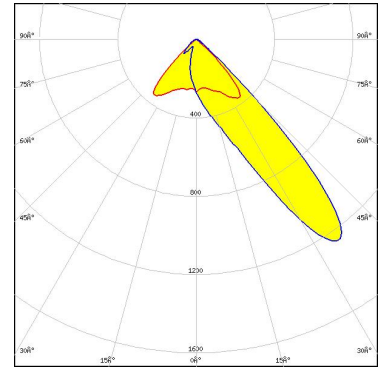

LED LUXEON HL4X  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Light distribution files

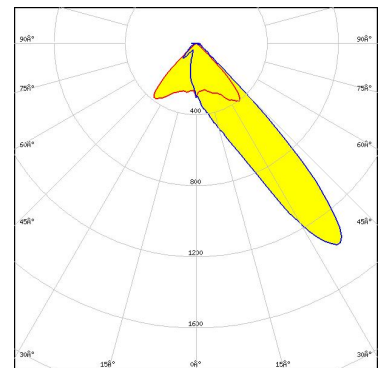

LED LUXEON HL4Z  
 FWHM / FWTM Asymmetric  
 Efficiency 87 %  
 Peak intensity 1.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass


Light distribution files

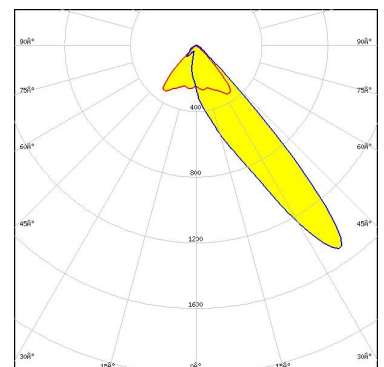

#### OPTICAL RESULTS (SIMULATED):





LED LUXEON HL4Z  
FWHM / FWTM Asymmetric  
Efficiency 95 %  
Peak intensity 1.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

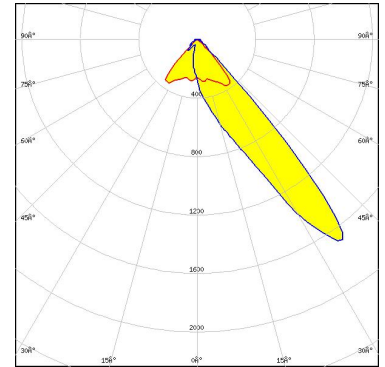

Light distribution files




LED SFT-12R-W-A  
FWHM / FWTM Asymmetric  
Efficiency 95 %  
Peak intensity 2 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

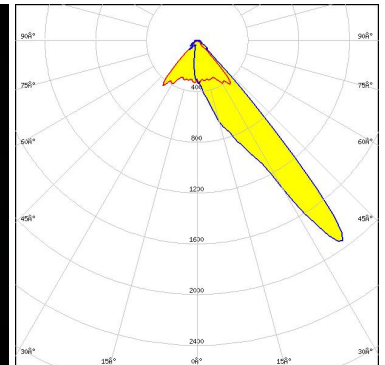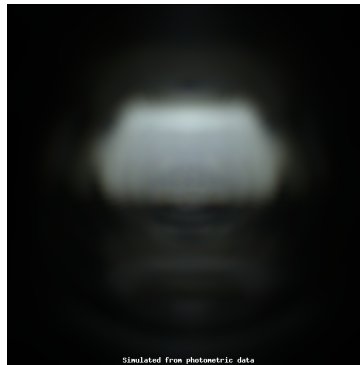

Light distribution files



LED SFT-12R-W-A  
FWHM / FWTM Asymmetric  
Efficiency 87 %  
Peak intensity 1.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

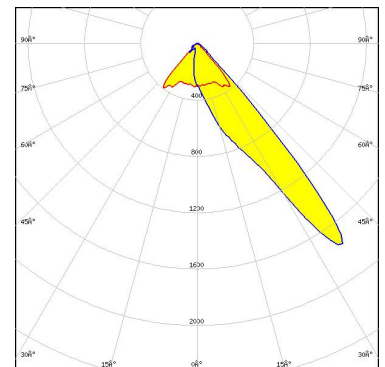

Protective plate, glass

Light distribution files




#### OPTICAL RESULTS (SIMULATED):



LED SFT-25R-W-A  
 FWHM / FWTM Asymmetric  
 Efficiency 87 %  
 Peak intensity 1.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass

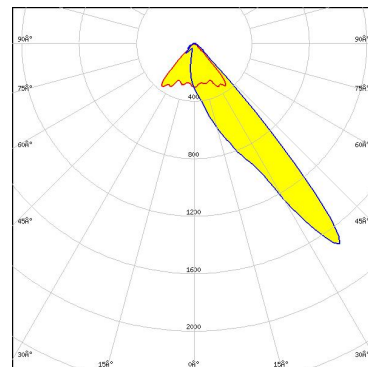


Light distribution files



LED SFT-25R-W-A  
 FWHM / FWTM Asymmetric  
 Efficiency 95 %  
 Peak intensity 1.9 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:



Simulated from photometric data

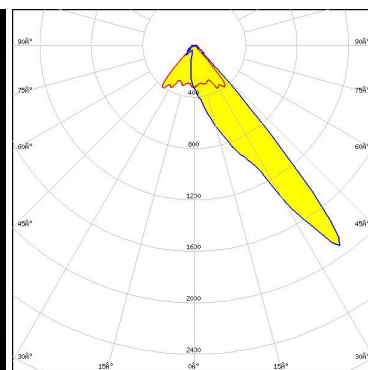


Light distribution files



LED SST-20 Gen1  
 FWHM / FWTM Asymmetric  
 Efficiency 85 %  
 Peak intensity 1.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass

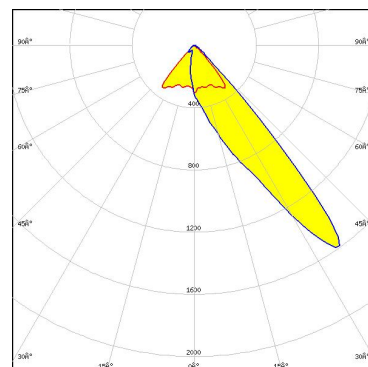

Light distribution files


#### OPTICAL RESULTS (SIMULATED):



LED NV4WB35AM  
 FWHM / FWTM Asymmetric  
 Efficiency 84 %  
 Peak intensity 1.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass


Light distribution files

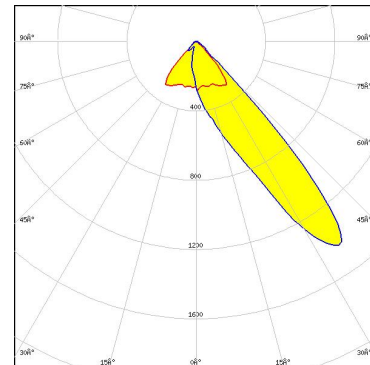

LED RLE 2x4 2000lm HP EXC2 OTD  
 FWHM / FWTM Asymmetric  
 Efficiency 84 %  
 Peak intensity 1.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Protective plate, glass

Light distribution files

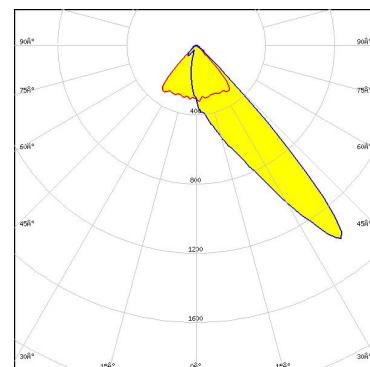

LED RLE 2x8 4000lm HP EXC2 OTD  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 1.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Light distribution files

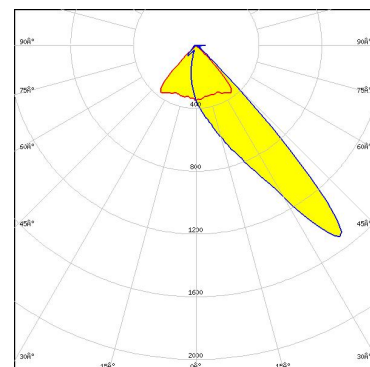

#### OPTICAL RESULTS (SIMULATED):

#### TRIDONIC


LED	RLE 2x8 6000lm HP HE EXC3 OTD
FWHM / FWTM	Asymmetric
Efficiency	89 %
Peak intensity	1.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

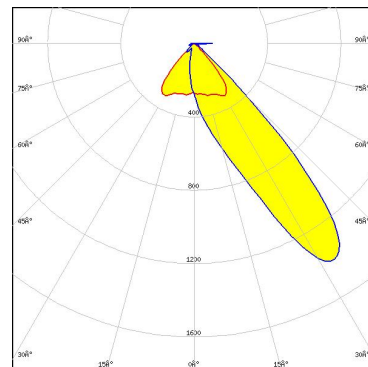

Light distribution files

#### TRIDONIC

LED	RLE 2x8 6000lm HP HE EXC3 OTD
FWHM / FWTM	Asymmetric
Efficiency	82 %
Peak intensity	1.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

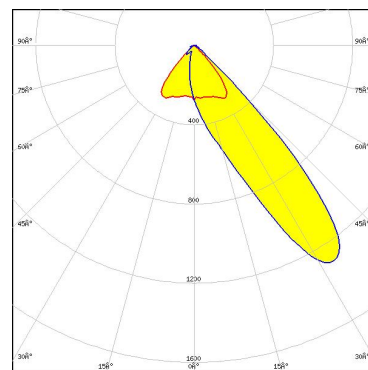

Light distribution files

Protective plate, glass

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 7  
FI-24100 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Poznan, Poland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)